


Rev	Nature of Modification	DATE
01	初版	2016/11/25




正视图

侧视图

背视图

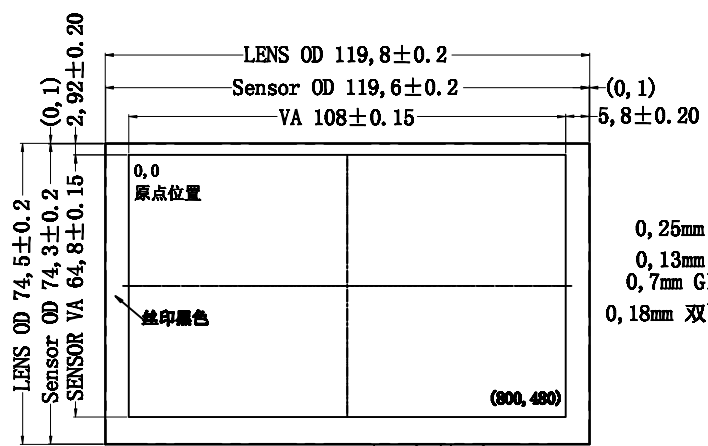

- 0,25mm PET
- 0,13mm OCA
- 0,7mm Glass
- 0,18mm 双面胶

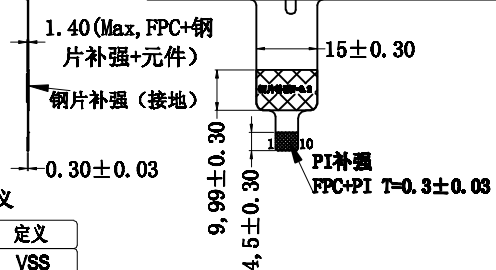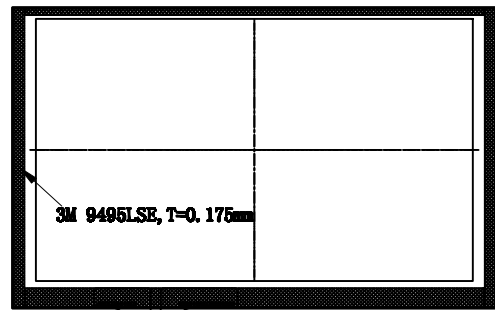

- 技术参数:
- IC型号: FT5216
 - 工作电压: 2.8V-3.3 V;
I2C通讯电压 2.8V-3.3 V
 - 透光率: ≥80%
 - 表面硬度: 2H
 - 工作环境: -10℃~+60℃, ≤90%RH
 - 储存环境: -20℃~+70℃, ≤90%RH
 - 未注尺寸公差按±0.2mm
 - 符合ROHS环保要求。

逻辑定义

PIN	定义
1	VSS
2	VDD
3	SCL
4	VSS
5	SDA
6	VSS
7	/RST
8	NC
9	INT
10	VSS

SCALE: 1:1 NOT TO SCALE		电话: 0755-29190292 传真: 0755-29190291	
PAGE: 1 OF 1		MODEL NUMBER :	
GENERAL TOL. 0.50mm	UNITS MM	RXC-PG05003-01	
APPROVALS	DATE	DATE: 2016-11-25	
APP:		CUSTOMER NO.:	
CHK:		DATE:	
DWN: FengWei	2016-11-25		

8 7 6 由 Autodesk 教育版产品制作 3 2 1

8 7 6 由 Autodesk 教育版产品制作 3 2 1